




Steel

Knurled shank
 Flat head
 Open end

Zinktop 480h, Cr^{VI} - free

UPO KN

improved
 nominal knurl

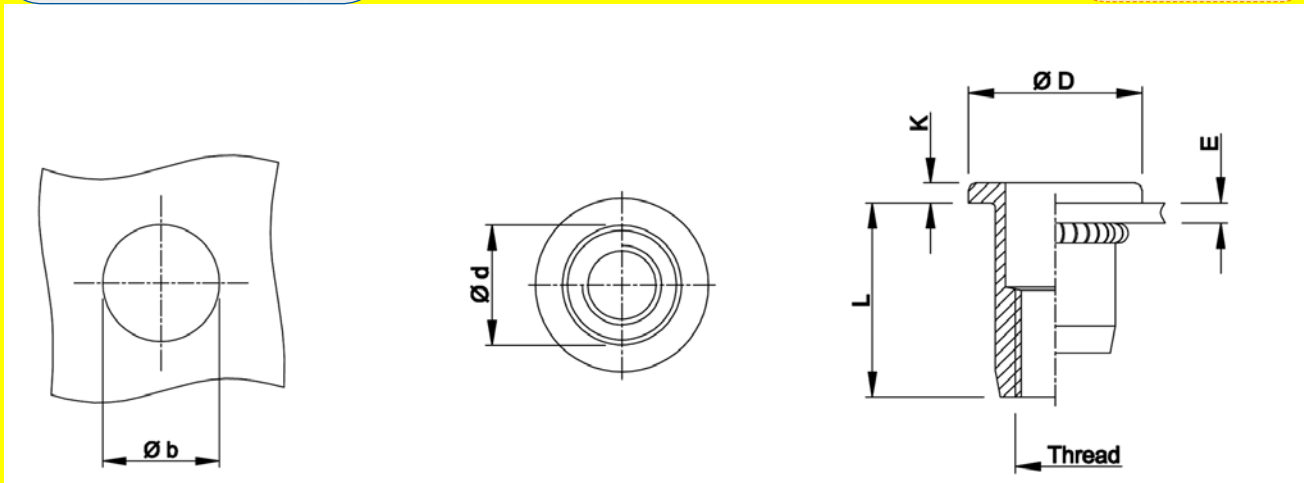

THREAD	TYPE	E = grip	L	b ^{+0,1} = drill dia	d = shank dia	D	K	kg/1000	ORDER CODE	BOX Q
M4	UPO30 KN	0,5-3,0	10,75	6,0	6,0	10,0	0,75	1,5	524 0297*	5000
	UPO45 KN	3,0-4,5	12,25	6,0	6,0	10,0	0,75	1,5	524 0497*	5000
M5	UPO30 KN	0,5-3,0	12,0	7,0	7,0	11,0	1,0	2,1	525 0297*	4000
	UPO55 KN	3,0-5,5	15,0	7,0	7,0	11,0	1,0	2,5	525 0497*	3000
M6	UPO30 KN	0,5-3,0	14,5	9,0	9,0	13,0	1,5	4,3	526 0297	2000
	UPO55 KN	3,0-5,5	16,5	9,0	9,0	13,0	1,5	4,7	526 0697*	2000
M8	UPO30 KN	0,5-3,0	16,0	11,0	11,0	16,0	1,5	6,4	528 0227	1250
	UPO55 KN	3,0-5,5	18,5	11,0	11,0	16,0	1,5	7,0	528 0697*	1250

* **Non-stock item:** minimum order quantity required after depletion of stock

KN programme in progress (also UFO version)

All dimensions in mm - Technical data subject to modification
 Tolerances and characteristics see chapter 'Technical Information'



How to order or inquire: Please prefix the TUBTARA order code with 'R852-' example: R852-513550